

A Wide Range of Basic Output Units for High Speed Output and Different Applications

- These Output Units receive the results of output instructions from the CPU Unit and perform ON/OFF control for external devices.
- High-speed Output models CJ1W-OD213 and CJ1W-OD234 can help to increase system throughput.



CJ1W-OD213



CJ1W-OD234

Features

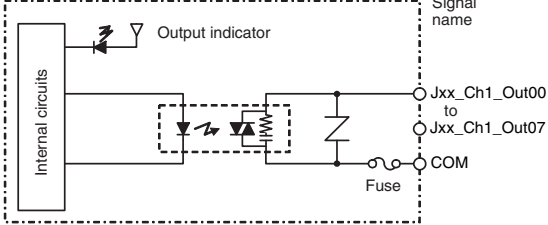
- High-speed output models are available, meeting versatile applications.
ON Response Time: 15μs, OFF Response Time: 80μs
- Output Units are available with any of three output types: relay contact outputs, triac outputs, or transistor outputs.
- For transistor outputs, select from sinking outputs or sourcing outputs.
- Output Units with load short-circuit protection are also available. *1
- Select the best interface for each application: Fujitsu / OTAX connectors or MIL connectors. *2
- A wide variety of Connector-Terminal Block Conversion Units are available to allow you to easily wire external output devices.

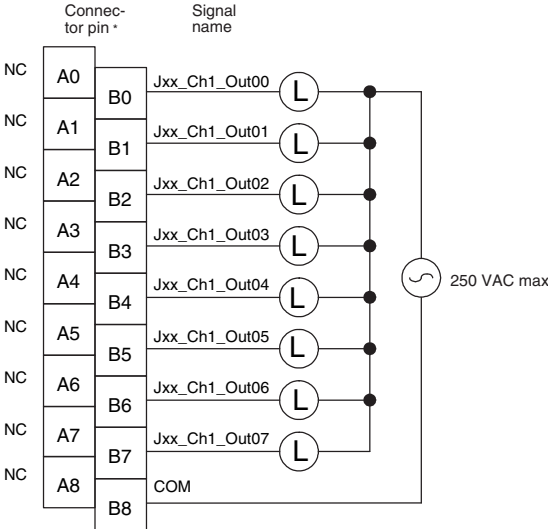
*1. The following Units have load short-circuit protection: CJ1W-OC202, CJ1W-OD204, CJ1W-OD212, and CJ1W-OD232.

*2. Available for models with 32 outputs or 64 outputs

CJ1W-OA201/CJ1W-OA201-1 Triac Output Unit (8 Points)

Name	8-point Triac Output Unit with Terminal Block
Model	CJ1W-OA201/CJ1W-OA201-1
Max. Switching Capacity	0.6 A 250 VAC, 50/60 Hz (2.4 A/Unit)
Max. Inrush Current	15 A (pulse width: 10 ms max.)
Min. Switching Capacity	50 mA 75 VAC
Leakage Current	1.5 mA (200 VAC) max.
Residual Voltage	1.6 VAC max.
ON Response Time	1 ms max.
OFF Response Time	1/2 of load frequency + 1 ms or less.
Number of Circuits	8 (8 points/common, 1 circuit)
Surge Protector	C.R Absorber + Surge Absorber
Fuses	5 A (1/common, 1 used) The fuse cannot be replaced by the user.
Insulation Resistance	20 MΩ between the external terminals and the GR terminal (500 VDC)
Dielectric Strength	2,000 VAC between the external terminals and the GR terminal for 1 minute at a leakage current of 10 mA max.
Internal Current Consumption	220 mA max.
Weight	150 g max.

Circuit Configuration	<div><ul style="list-style-type: none">• The signal names of the terminals are the device variable names. The device variable names are the names that use "Jxx" as the device name.</div>
-----------------------	--

External connection and terminal-device variable diagram	<div><ul style="list-style-type: none">• The signal names of the terminals are the device variable names. The device variable names are the names that use "Jxx" as the device name.</div>
--	---

* Terminal numbers A0 to A8 and B0 to B8 are used in the external connection and terminal-device variable diagrams. They are not printed on the Units.
Note: Although 16 I/O bits (1 word) are allocated, only 8 of these can be used for external I/O.