


Amplifier Built-in



Ultra-slim Photoelectric Sensor

EX-10 SERIES Ver.2

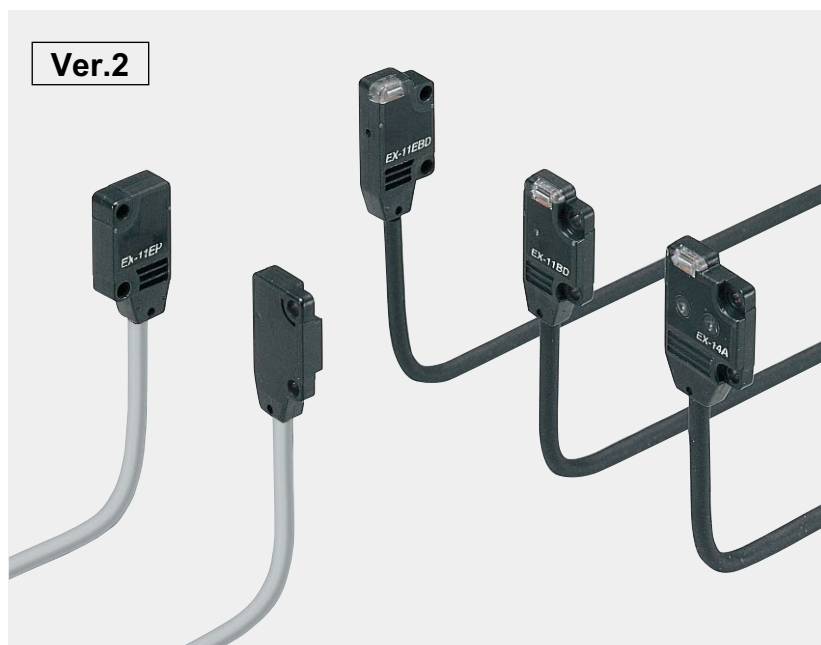

EX-10 SERIES Ver.2

Ver.2

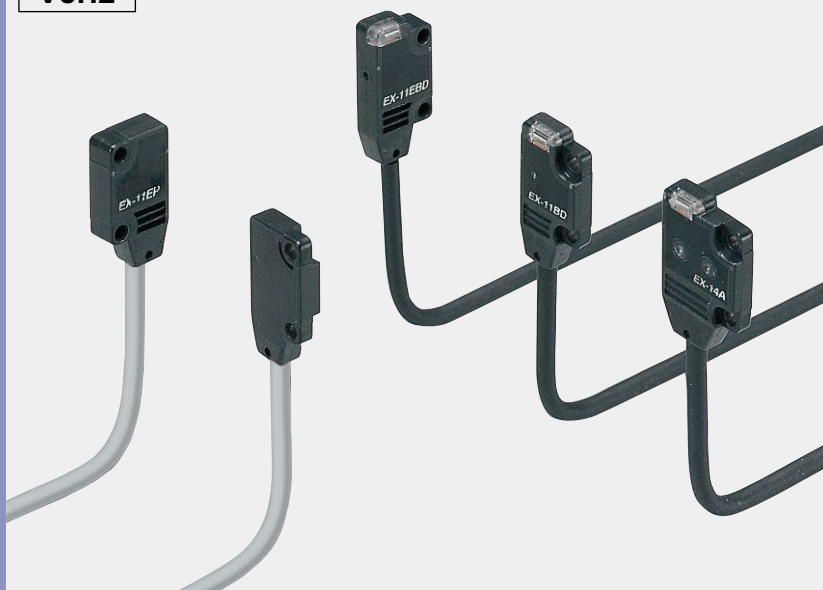

Amplifier built-in extraordinarily small and slim size

Smallest body, just 3.5 mm 0.138 in thick

It can be mounted in a very small space as its size is just W10 × H14.5 × D3.5 mm
W0.394 × H0.571 × D0.138 in
(thru-beam, front sensing type).



Flexible mounting

The diffuse reflective type sensor is front sensing and is so thin that it gives an impression of being just pasted on the mounting base. The thru-beam type is available as front sensing type, as well as, side sensing type, allowing flexible mounting.

Thru-beam
• Front sensing type

• Side sensing type

Diffuse reflective
• Front sensing type




A wide variety of narrow-beam type! Light diffusion is approx. 1/2 of standard type.

EX-□S□


Less interference with no slit, narrow-pitch can be set.

The pitch of installation is 1/2 of conventional models, so that the close-installation is possible. No cost is necessary to purchase or install a slit.

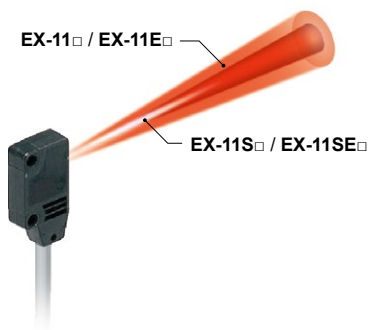


Possible to sense a minute object less than $\varnothing 0.5$ mm $\varnothing 0.039$ in with no slit.







The series is applicable to sense a minute object without any cost.

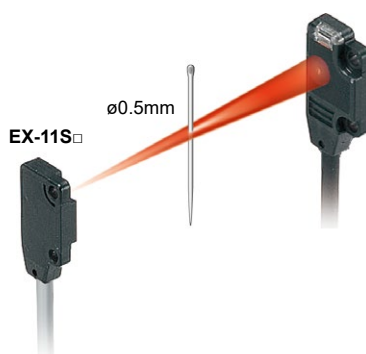


Long sensing range of 1 m 3.281 ft with narrow beam

A long 1 m 3.281 ft sensing range is possible with narrow beam.

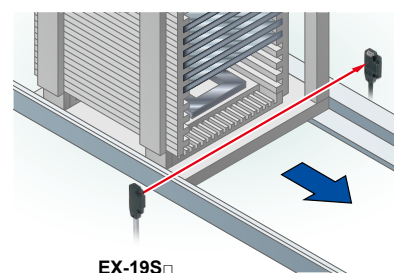


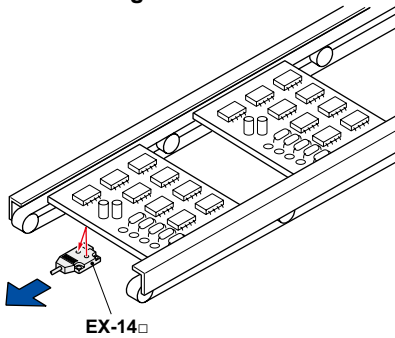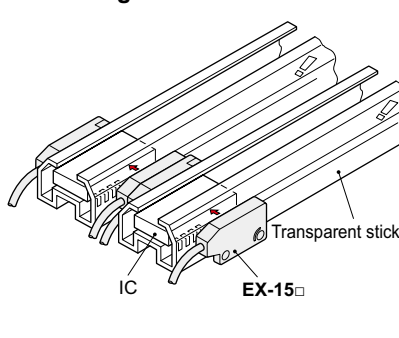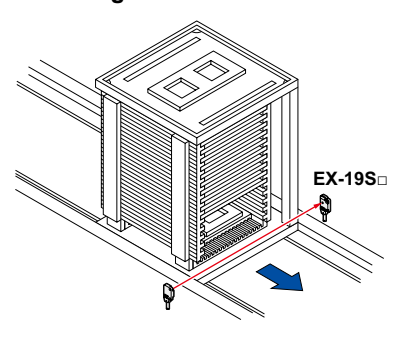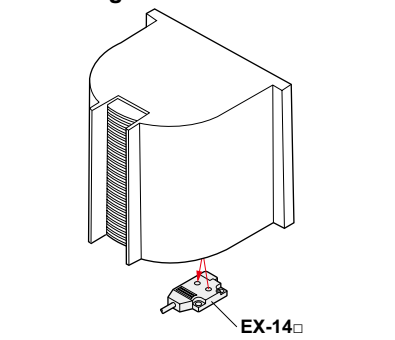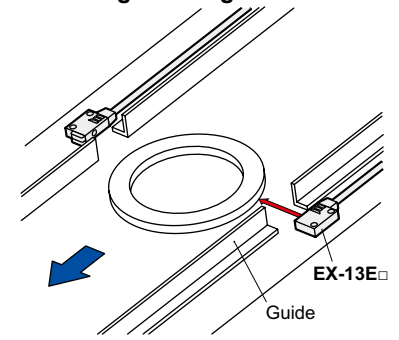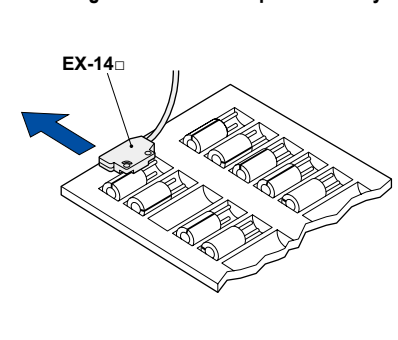APPLICATIONS**Positioning of PCBs****Detecting ICs****Detecting PCB rack****Detecting wafer cassette****Detecting thin ring****Checking for absence of capacitor in tray****BASIC PERFORMANCE****Electric power saving**


The EX-10 series achieves reductions in power consumption of up to 65 %. These sensors contribute to environmental friendliness.

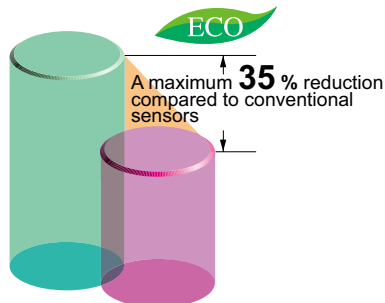**High-speed response time: 0.5 ms**


The sensor is suitable for detecting small and high-speed traveling objects.

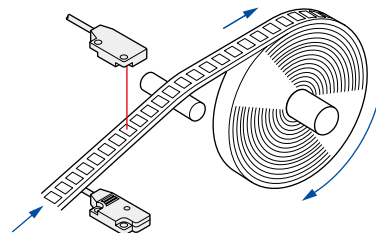**Minimum sensing object: $\phi 1$ mm $\phi 0.039$ in EX-11(E)□, EX-15(E)□**


EX-11□, EX-11E□, EX-15 and EX-15E are incorporated with $\phi 1$ mm $\phi 0.039$ in slit masks so that $\phi 1$ mm $\phi 0.039$ in, or more, object can be detected. Hence, they are suitable for precise positioning or small parts detection.

**Long sensing range: 1 m 3.281 ft EX-19(E)□**


A sensing range of 1 m 3.281 ft has been realized with a slim size of just 3.5 mm 0.138 in. It can be used to detect even wide IC trays.

**Background suppression****Hardly affected by background**

Even a specular background separated by 100 mm 3.937 in, or more, is not detected. (However, the background should be directly opposite. A spherical or curved background may be detected.)

**Black object reliably detected**


It can reliably detect dark color objects since it is convergent reflective type.

**EX-14□**

ENVIRONMENTAL RESISTANCE

Incorporated an inverter countermeasure circuit

The **EX-10** series become significantly stronger against inverter light and other extraneous light.



Waterproof IP67

The sensors features an IP67 rating to allow their use in process lines where water is used or splashed. Rust-resistant stainless steel sensor mounting brackets are available.

Note: If water splashes on the sensor during sensing operation, it may sense water as an object.

Bending durability

EX-□-R

Bending-resistant cable type **EX-□-R** is available. It is most suitable for moving parts, such as robot arm, etc.


MOUNTING / SIZE

Mountable with M3 screws

Non-corrosive stainless steel type sensor mounting bracket is also available.


- **MS-EX10-1**
[Cold rolled carbon steel (SPCC)]

MS-EX10-11
[Stainless steel (SUS304)]
(mounting bracket for the front sensing type)




- **MS-EX10-2**
[Cold rolled carbon steel (SPCC)]

MS-EX10-12
[Stainless steel (SUS304)]
(mounting bracket for the side sensing type)



- **MS-EX10-3**
[Cold rolled carbon steel (SPCC)]

MS-EX10-13
[Stainless steel (SUS304)]
(L-shaped mounting bracket)

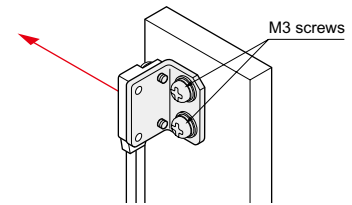

Note: Sensor mounting brackets can not be used for the narrow beam type (**EX-□S□**).

Red beam makes beam alignment easy

The red LED beam projected from the emitter helps you to align the sensor heads.

OTHERS

Compliant with safety standards! (excluding EX-15□ / 17□)


Sensor unit complies with Category 1 PLc.

ISO 13849-1: 2015 Safety-related parts of control systems
Part 1: General principles for design

A Category 3 PLd Safety System can be built

By using Category 4 PLe compliant controllers together with our sensors. Sensor redundancy is required!

- Category 3, PLd construction example

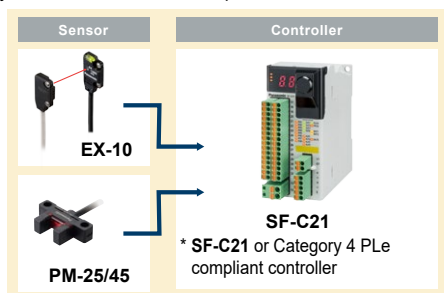


- Do not use the two outputs from **PM-25/45** series unit for achieving the redundancy (duplication) of safety circuit.

* For more information, see our website or product flyer.

Can be retrofit and installed in a very small space as a safety-standard-compliant photoelectric sensor for added safety.

Example of use: For detection of opening / closing of door in front of load port / EFEM robot

- When robot arm is the source of hazards

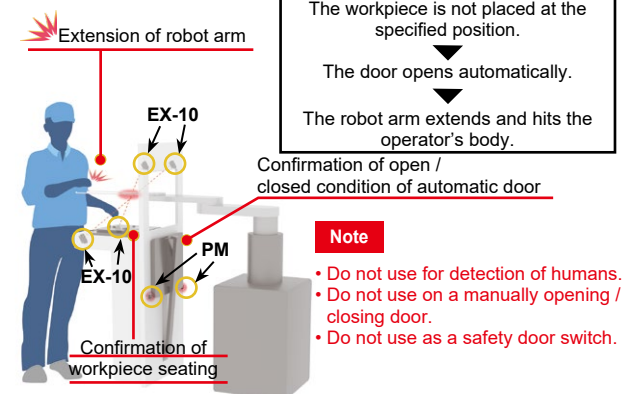

Risk factors (sensor malfunction)

The workpiece is not placed at the specified position.
The door opens automatically.
The robot arm extends and hits the operator's body.

Confirmation of open / closed condition of automatic door

Note

- Do not use for detection of humans.
- Do not use on a manually opening / closing door.
- Do not use as a safety door switch.

Less resources used

Based on environmental considerations, simplified packaging is used in order to reduce waste. In addition, the bag is made from polyethylene which produces no toxic gases even when burned.



ORDER GUIDE

| Type | | | Appearance | Sensing range | Model No.(Note 2) | | Output operation | Output | | |
|------------------|---|---|--------------|------------------|---|------------------|---|---|--|----------|
| | | | | | NPN output | PNP output | | | | |
| Standard type | Thru-beam | Front sensing | | | 150 mm 5.906 in | EX-11A | EX-11A-PN | Light-ON | NPN open-collector transistor or PNP open-collector transistor | |
| | | | | | | EX-11B | EX-11B-PN | Dark-ON | | |
| | | | | | 500 mm 19.685 in | EX-13A | EX-13A-PN | Light-ON | | |
| | | | | | | EX-13B | EX-13B-PN | Dark-ON | | |
| | | | | | 1 m 3.281 ft | EX-19A | EX-19A-PN | Light-ON | | |
| | | | | | | EX-19B | EX-19B-PN | Dark-ON | | |
| | | With operation mode switch on the bifurcation | | | 150 mm 5.906 in | EX-15 | —— | Switchable either Light-ON or Dark-ON | | |
| | | | | | 500 mm 19.685 in | EX-17 | —— | Switchable either Light-ON or Dark-ON | | |
| | | Side sensing | | | | 150 mm 5.906 in | EX-11EA | EX-11EA-PN | | Light-ON |
| | | | | | | | EX-11EB | EX-11EB-PN | | Dark-ON |
| | | | | | | 500 mm 19.685 in | EX-13EA | EX-13EA-PN | | Light-ON |
| | | | | | | | EX-13EB | EX-13EB-PN | | Dark-ON |
| | | | 1 m 3.281 ft | | EX-19EA | EX-19EA-PN | Light-ON | | | |
| | | | | | EX-19EB | EX-19EB-PN | Dark-ON | | | |
| | With operation mode switch on the bifurcation | | | 150 mm 5.906 in | EX-15E | —— | Switchable either Light-ON or Dark-ON | | | |
| | | | | 500 mm 19.685 in | EX-17E | —— | Switchable either Light-ON or Dark-ON | | | |
| | Convergent reflective (Diffused beam type) | Front sensing | | | 2 to 25 mm 0.079 to 0.984 in (Note 1) (Convergent point: 10 mm 0.394 in) | EX-14A | EX-14A-PN | Light-ON | | |
| | | | | | | EX-14B | EX-14B-PN | Dark-ON | | |
| Narrow beam type | Thru-beam | Front sensing | | | 150 mm 5.906 in | EX-11SA | EX-11SA-PN | Light-ON | NPN open-collector transistor or PNP open-collector transistor | |
| | | | | | | EX-11SB | EX-11SB-PN | Dark-ON | | |
| | | | | | 500 mm 19.685 in | EX-13SA | EX-13SA-PN | Light-ON | | |
| | | | | | | EX-13SB | EX-13SB-PN | Dark-ON | | |
| | | | | | 1 m 3.281 ft | EX-19SA | EX-19SA-PN | Light-ON | | |
| | | | | | EX-19SB | EX-19SB-PN | Dark-ON | | | |
| | | Side sensing | | | | 150 mm 5.906 in | EX-11SEA | EX-11SEA-PN | | Light-ON |
| | | | | | | | EX-11SEB | EX-11SEB-PN | | Dark-ON |
| | | | | | | 500 mm 19.685 in | EX-13SEA | EX-13SEA-PN | | Light-ON |
| | | | | | | | EX-13SEB | EX-13SEB-PN | | Dark-ON |
| | | | | | | | | | | |

NOTE: Mounting bracket is not supplied with the sensor. Please select from the range of optional sensor mounting brackets (**MS-EX10-□**). Sensor mounting brackets (**MS-EX10-□**) can not be used for the narrow beam type (**EX-□S□**).

Notes: 1) The sensor does not detect even a specular background if it is separated by 100 mm 3.937 in or more. (However, the background should be directly opposite. A spherical or curved background may be detected.)

2) The model No. with "P" shown on the label affixed to the thru-beam type sensor is the emitter, "D" shown on the label is the receiver.

Bending-resistant cable type

Bending-resistant cable type is also available for NPN output type. (excluding narrow beam type **EX-□S□** and sensor with operation mode switch on the bifurcation **EX-15□/17□**)

When ordering this type, suffix "-R" to the model No.

(e.g.) Bending-resistant cable type of **EX-11A** is "**EX-11A-R**".

5 m 16.404 ft cable length type

5 m 16.404 ft cable length type (standard: 2 m 6.562 ft) is also available for NPN output type. (excluding narrow beam type **EX-□S□** and bending-resistant cable type)

When ordering this type, suffix "-C5" to the model No.

(e.g.) 5 m 16.404 ft cable length type of **EX-11A** is "**EX-11A-C5**".

OPTIONS

NOTE: Sensor mounting brackets can not be used for the narrow beam type (EX-□S□).


| Designation | Model No. | Description |
|-------------------------------------|---|--|
| Sensor mounting bracket (Note 1) | MS-EX10-1 | Mounting bracket for the front sensing type sensor [Cold rolled carbon steel (SPCC)] (The thru-beam type sensor needs two brackets.) |
| | MS-EX10-2 | Mounting bracket for the side sensing type sensor [Cold rolled carbon steel (SPCC)] (The thru-beam type sensor needs two brackets.) |
| | MS-EX10-3 | L-shaped mounting bracket sensor [Cold rolled carbon steel (SPCC)] (The thru-beam type sensor needs two brackets.) |
| | MS-EX10-11 | Mounting bracket for the front sensing type sensor [Stainless steel (SUS304)] (The thru-beam type sensor needs two brackets.) |
| | MS-EX10-12 | Mounting bracket for the side sensing type sensor [Stainless steel (SUS304)] (The thru-beam type sensor needs two brackets.) |
| | MS-EX10-13 | L-shaped mounting bracket [Stainless steel (SUS304)] (The thru-beam type sensor needs two brackets.) |
| Slit mask | OS-EX10-12 (Slit size ø1.2 mm ø0.047 in) | Slit on one side <ul style="list-style-type: none"> • Sensing range: 600 mm 23.622 in [EX-19□] 250 mm 9.843 in [EX-13□, EX-17□] • Min. sensing object: ø2 mm ø0.079 in |
| | | Slit on both sides <ul style="list-style-type: none"> • Sensing range: 400 mm 15.748 in [EX-19□] 200 mm 7.874 in [EX-13□, EX-17□] • Min. sensing object: ø1.2 mm ø0.047 in |
| | OS-EX10-15 (Slit size ø1.5 mm ø0.059 in) | Slit on one side <ul style="list-style-type: none"> • Sensing range: 800 mm 31.496 in [EX-19□] 350 mm 13.780 in [EX-13□, EX-17□] • Min. sensing object: ø2 mm ø0.079 in |
| | | Slit on both sides <ul style="list-style-type: none"> • Sensing range: 500 mm 19.685 in [EX-19□] 300 mm 11.811 in [EX-13□, EX-17□] • Min. sensing object: ø1.5 mm ø0.059 in |
| | OS-EX10E-12 (Slit size ø1.2 mm ø0.047 in) | Slit on one side <ul style="list-style-type: none"> • Sensing range: 400 mm 15.748 in [EX-19E□] (Note 2) 250 mm 9.843 in [EX-13E□, EX-17E□] • Min. sensing object: ø1.2 mm ø0.047 in [EX-19E□] (Note 2) ø2 mm ø0.079 in [EX-13E□, EX-17E□] |
| | | Slit on both sides <ul style="list-style-type: none"> • Sensing range: 200 mm 7.874 in [EX-13E□, EX-17E□] • Min. sensing object: ø1.2 mm ø0.047 in |
| Mounting screw | MS-M2 | Mounting screws with washers (50 pcs. lot). It can mount securely as it is spring washer attached. |

Notes: 1) Can not be used for the narrow beam type (EX-□S□).


2) Since EX-19E□ has a built-in ø1 mm ø0.039 in slit in the emitter, be sure to mount it in the receiver.

Slit mask


- OS-EX10-12
- OS-EX10-15



- OS-EX10E-12




Example of mounting
(OS-EX10E-12)



Tighten along with the sensor mounting bracket.


Sensor mounting bracket

- MS-EX10-1




Material: Cold rolled carbon steel (SPCC)
(Uni-chrome plated)
Two M2 (length 4 mm **0.157 in**) pan head screws are attached.

- MS-EX10-11




Material: Stainless steel (SUS304)
Two M2 (length 4 mm **0.157 in**) pan head screws [stainless steel (SUS304)] are attached.

- MS-EX10-2




Material: Cold rolled carbon steel (SPCC)
(Uni-chrome plated)
Two M2 (length 8 mm **0.315 in**) pan head screws are attached.

- MS-EX10-12




Material: Stainless steel (SUS304)
Two M2 (length 8 mm **0.315 in**) pan head screws [stainless steel (SUS304)] are attached.

- MS-EX10-3



Material: Cold rolled carbon steel (SPCC)
(Uni-chrome plated)
Two M2 (length 4 mm **0.157 in**) pan head screws, and two M2 (length 8 mm **0.315 in**) pan head screws are attached.

- MS-EX10-13



Material: Stainless steel (SUS304)
Two M2 (length 4 mm **0.157 in**) pan head screws [stainless steel (SUS304)] and two M2 (length 8 mm **0.315 in**) pan head screws [stainless steel (SUS304)] are attached.

SPECIFICATIONS

| Type | | | Thru-beam · standard type | | | | | |
|---|--------------------------|----------|--|--------------|--|---|--|--------------|
| | | | Front sensing | Side sensing | Front sensing | Side sensing | Front sensing | Side sensing |
| Item | Model No. (Note 2) | Light-ON | EX-11A(-PN) | EX-11EA(-PN) | EX-13A(-PN) | EX-13EA(-PN) | EX-19A(-PN) | EX-19EA(-PN) |
| | | Dark-ON | EX-11B(-PN) | EX-11EB(-PN) | EX-13B(-PN) | EX-13EB(-PN) | EX-19B(-PN) | EX-19EB(-PN) |
| Applicable regulations and certifications | | | CE Marking (EMC Directive, RoHS Directive), UKCA Marking (EMC Regulations, RoHS Regulations), ISO 13849-1 (Category 1, PLc) (Note 3), UL Recognition certification (Note 4) | | | | | |
| Sensing range | | | 150 mm 5.906 in | | 500 mm 19.685 in | | 1 m 3.281 ft | |
| Min. sensing object | | | ø1 mm ø0.039 in opaque object (Completely beam interrupted object) (Setting distance between emitter and receiver: 150 mm 5.906 in) | | ø2 mm ø0.079 in opaque object (Completely beam interrupted object) (Setting distance between emitter and receiver: 500 mm 19.685 in) | | ø2 mm ø0.079 in opaque object (Completely beam interrupted object) (Setting distance between emitter and receiver: 1 m 3.281 ft) | |
| Hysteresis | | | — | | | | | |
| Repeatability (perpendicular to sensing axis) | | | 0.05 mm 0.002 in or less | | | | | |
| Supply voltage | | | 12 to 24 V DC ±10 % Ripple P-P 10 % or less | | | | | |
| Current consumption | | | Emitter: 10 mA or less, Receiver: 10 mA or less | | | | | |
| Output | | | <NPN output type> NPN open-collector transistor • Maximum sink current: 50 mA • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 2 V or less (at 50 mA sink current) 1 V or less (at 16 mA sink current) | | | <PNP output type> PNP open-collector transistor • Maximum source current: 50 mA • Applied voltage: 30 V DC or less (between output and +V) • Residual voltage: 2 V or less (at 50 mA source current) 1 V or less (at 16 mA source current) | | |
| | | | Utilization category | | | DC-12 or DC-13 | | |
| | | | Short-circuit protection | | | Incorporated | | |
| Response time | | | 0.5 ms or less | | | | | |
| Operation indicator | | | Orange LED (lights up when the output is ON) | | | | | |
| Incident beam indicator | | | — | | | | | |
| Stability indicator | | | Green LED (lights up under stable light received condition or stable dark condition) | | | | | |
| Environmental resistance | Pollution degree | | 3 (Industrial environment) | | | | | |
| | Protection | | IP67 (IEC) | | | | | |
| | Ambient temperature | | -25 to +55 °C -13 to +131 °F (No dew condensation or icing allowed), Storage: -30 to +70 °C -22 to +158 °F | | | | | |
| | Ambient humidity | | 35 to 85 % RH, Storage: 35 to 85 % RH | | | | | |
| | Ambient illuminance | | Incandescent light: 3,000 lx or less at the light-receiving face | | | | | |
| | Voltage withstandability | | 1,000 V AC for one min. between all supply terminals connected together and enclosure | | | | | |
| | Insulation resistance | | 20 MΩ, or more, with 250 V DC megger between all supply terminals connected together and enclosure | | | | | |
| | Vibration resistance | | 10 to 500 Hz frequency, 3 mm 0.118 in double amplitude in X, Y and Z directions for two hours each | | | | | |
| Shock resistance | | | 500 m/s ² acceleration (50 G approx.) in X, Y and Z directions three times each | | | | | |
| Emitting element | | | Red LED [Peak emission wavelength: 680 nm 0.027 mil (EX-19E□: 624 nm 0.025 mil), modulated] | | | | | |
| Material | | | Enclosure: Polyarylate, Lens: Polyarylate | | | | | |
| Cable (Note 5) | | | 0.1 mm ² 3-core (thru-beam type emitter: 2-core) cabtyre cable, 2 m 6.562 ft long | | | | | |
| Cable extension | | | Extension up to total 50 m 164 ft is possible with 0.3 mm ² , or more, cable (thru-beam type: emitter and receiver). (Note 6) | | | | | |
| Weight | | | Net weight (each emitter and receiver): 20 g approx., Gross weight: 50 g approx. | | | | | |
| Accessories | | | Mounting screws: 1 set | | | | | |

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C +73.4 °F.

2) Model Nos. having the suffix “-PN” are PNP output type.

3) Conformed from December 2021 production.

4) Except 5 m **16.404 ft** cable length type. (**EX-19E□-C5** is included in the certified products.)

5) The bending-resistant cable type (model Nos. having suffix “-R”) has a 0.1 mm² 3-core (thru-beam type emitter: 2-core) bending-resistant cabtyre cable, 2 m **6.562 ft** long.

6) For safety applications, do not exceed 30 m 98.425 ft.

SPECIFICATIONS

| Item | Type | | Thru-beam · narrow beam type | | | | | | Convergent reflective (Diffused beam type) | Thru-beam · with operation mode switch on bifurcation | | | |
|---|--------------------------|--------------|--|--|-------------------------|--|---------------------|---|---|---|---|-------------------|--------------------|
| | | | Front sensing | Side sensing | Front sensing | Side sensing | Front sensing | Front sensing | Front sensing | Side sensing | Front sensing | Side sensing | |
| | Model No. (Note 2) | Light-ON | EX-11SA(-PN) | EX-11SEA(-PN) | EX-13SA(-PN) | EX-13SEA(-PN) | EX-19SA(-PN) | EX-14A(-PN) | | EX-15 (Note 3) | EX-15E (Note 3) | EX-17 (Note 3) | EX-17E (Note 3) |
| | Dark-ON | EX-11SB(-PN) | EX-11SEB(-PN) | EX-13SB(-PN) | EX-13SEB(-PN) | EX-19SB(-PN) | EX-14B(-PN) | | | | | | |
| Applicable regulations and certifications | | | CE Marking (EMC Directive, RoHS Directive), UKCA Marking (EMC Regulations, RoHS Regulations), ISO 13849-1 (Category 1, PLc) (Note 4), UL Recognition certification (Note 5) | | | | | | RoHS Directive, UL Recognition certification (Note 5) | | | | |
| Sensing range | | | 150 mm 5.906 in | | 500 mm 19.685 in | | 1 m 3.281 ft | 2 to 25 mm 0.079 to 0.984 in (Note 6) (Conv. point: 10 mm 0.394 in) | 150 mm 5.906 in | | 500 mm 19.685 in | | |
| Min. sensing object | | | ø0.5 mm ø0.002 in opaque object (Completely beam interrupted object) (Note 7) | ø1 mm ø0.039 in opaque object (Completely beam interrupted object) (Note 7) | | ø2 mm ø0.079 in opaque object (Completely beam interrupted object) (Note 7) | | ø0.1 mm ø0.004 in copper wire (Setting distance: 10 mm 0.394 in) | ø1 mm ø0.039 in opaque object (Completely beam interrupted object) (Setting distance between emitter and receiver: 150 mm 5.906 in) | | ø2 mm ø0.079 in opaque object (Completely beam interrupted object) (Setting distance between emitter and receiver: 500 mm 19.685 in) | | |
| Hysteresis | | | ————— | | | | | | 15 % or less of operation distance (Note 6) | ————— | | | |
| Repeatability (perpendicular to sensing axis) | | | 0.05 mm 0.002 in or less | | | | | | 0.1 mm 0.004 in or less | 0.05 mm 0.002 in or less | | | |
| Supply voltage | | | 12 to 24 V DC ±10 % | | | | | | Ripple P-P 10 % or less | | | | |
| Current consumption | | | Emitter: 10 mA or less, Receiver: 10 mA or less | | | | | | 13 mA or less | 25 mA or less | | | |
| Output | | | <NPN output type> NPN open-collector transistor • Maximum sink current: 50 mA • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 2 V or less (at 50 mA sink current) 1 V or less (at 16 mA sink current) | | | | | | <PNP output type> PNP open-collector transistor • Maximum source current: 50 mA • Applied voltage: 30 V DC or less (between output and +V) • Residual voltage: 2 V or less (at 50 mA source current) 1 V or less (at 16 mA source current) | | | | |
| Utilization category | | | DC-12 or DC-13 | | | | | | NPN open-collector transistor • Maximum sink current: 100 mA • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 2 V or less (at 100 mA sink current) 1 V or less (at 16 mA sink current) | | | | |
| Short-circuit protection | | | Incorporated | | | | | | ————— | | | | |
| Response time | | | 0.5 ms or less | | | | | | | | | | |
| Operation indicator | | | Orange LED (lights up when the output is ON) | | | | | | Orange LED (lights up when the output is ON), located on the bifurcation | | | | |
| Incident beam indicator | | | ————— | | | | | | Orange LED (lights up under light received condition), located on the receiver | | | | |
| Stability indicator | | | Green LED (lights up under stable light received condition or stable dark condition) | | | | | | Green LED (lights up under stable light received condition or stable dark condition), located on the receiver | | | | |
| Environmental resistance | Pollution degree | | 3 (Industrial environment) | | | | | | ————— | | | | |
| | Protection | | IP67 (IEC) | | | | | | | | | | |
| | Ambient temperature | | -25 to +55 °C -13 to +131 °F (No dew condensation or icing allowed), Storage: -30 to +70 °C -22 to +158 °F | | | | | | | | | | |
| | Ambient humidity | | 35 to 85 % RH, Storage: 35 to 85 % RH | | | | | | | | | | |
| | Ambient illuminance | | Incandescent light: 3,000 lx or less at the light-receiving face | | | | | | | | | | |
| | Voltage withstandability | | 1,000 V AC for one min. between all supply terminals connected together and enclosure | | | | | | | | | | |
| | Insulation resistance | | 20 MΩ, or more, with 250 V DC megger between all supply terminals connected together and enclosure | | | | | | | | | | |
| | Vibration resistance | | 10 to 500 Hz frequency, 3 mm 0.118 in double amplitude in X, Y and Z directions for two hours each | | | | | | | | | | |
| Shock resistance | | | 500 m/s ² acceleration (50 G approx.) in X, Y and Z directions three times each | | | | | | | | | | |
| Emitting element | | | Red LED (Peak emission wavelength: 650 nm 0.026 mil , modulated) | | | | | | Red LED (Peak emission wavelength: 680 nm 0.027 mil , modulated) | | | | |
| Material | | | Enclosure: Polyarylate Lens: Polyarylate | | | | | | Enclosure: Polyarylate Lens: Polyarylate, Bifurcation: Polyarylate | | | | |
| Cable (Note 8) | | | 0.1 mm ² 3-core (thru-beam type emitter: 2-core) cabtyre cable, 2 m 6.562 ft long | | | | | | 0.2 mm ² 3-core cabtyre cable, 2 m 6.562 ft long (beyond bifurcation; from emitter / receiver to bifurcation: 0.5 m 1.640 ft long) | | | | |
| Cable extension | | | Extension up to total 50 m 164 ft is possible with 0.3 mm ² , or more, cable (thru-beam type: emitter and receiver). (Note 9) | | | | | | Extension up to total 100 m 328 ft is possible with 0.3 mm ² , or more, cable. | | | | |
| Weight | | | Net weight (each emitter and receiver): 20 g approx., Gross weight: 50 g approx. | | | | | | Net weight: 20 g approx. Gross weight: 40 g approx. | Net weight: 55 g approx., Gross weight: 80 g approx. | | | |
| Accessories | | | Mounting screws: 1 set | | | | | | Mounting screws: 1 set | Mounting screws: 1 set, Adjusting screwdriver: 1 pc. | | | |

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.

2) Model Nos. having the suffix “-PN” are PNP output type. 3) Either Light-ON or Dark-ON can be selected by the operation mode switch.


4) Conformed from December 2021 production. 5) Except 5 m **16.404 ft** cable length type.

6) The sensing range and the hysteresis of convergent reflective type sensor are specified for white non-glossy paper (50 × 50 mm **1.969 × 1.969 in**) as the object.

7) The min. sensing objects are specified in case the emitter / receiver sensing range is to set the maximum.


8) The bending-resistant cable type (model Nos. having suffix “-R”) has a 0.1 mm² 3-core (thru-beam type emitter: 2-core) bending-resistant cabtyre cable, 2 m **6.562 ft** long.

9) For safety applications, do not exceed 30 m **98.425 ft**.

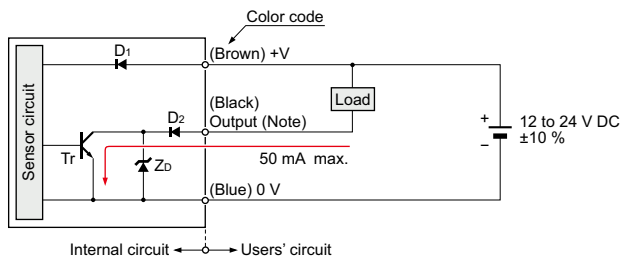
I/O CIRCUIT AND WIRING DIAGRAMS**EX-11□ EX-11S□ EX-13□ EX-13S□ EX-19□ EX-19S□ EX-14□****NPN output type****I/O circuit diagram**

Note: The emitter of the thru-beam type sensor does not incorporate the output.

Symbols ... D1: Reverse supply polarity protection diode
D2: Reverse output polarity protection diode
ZD: Surge absorption zener diode
Tr: NPN output transistor

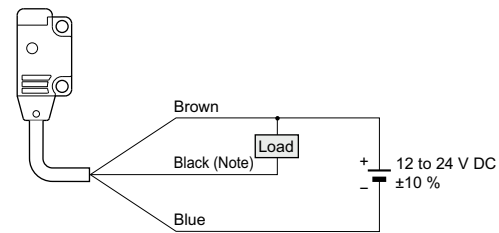
Wiring diagram

Note: The emitter of the thru-beam type sensor does not incorporate the black wire.

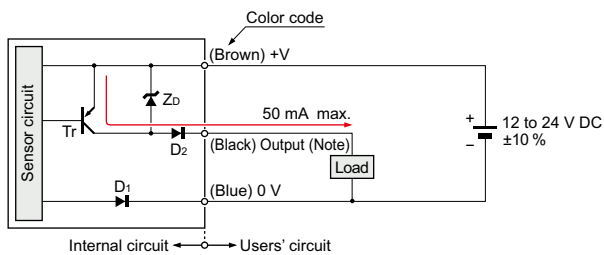
EX-11□-PN EX-11S□-PN EX-13□-PN EX-13S□-PN EX-19□-PN EX-19S□-PN EX-14□-PN**PNP output type****I/O circuit diagram**

Note: The emitter of the thru-beam type sensor does not incorporate the output.

Symbols ... D1: Reverse supply polarity protection diode
D2: Reverse output polarity protection diode
ZD: Surge absorption zener diode
Tr: PNP output transistor

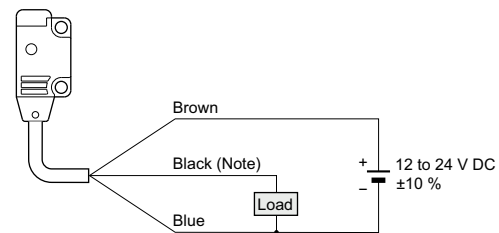Wiring diagram

Note: The emitter of the thru-beam type sensor does not incorporate the black wire.

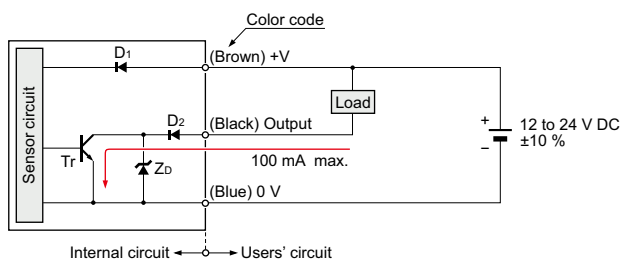EX-15□ EX-15E□ EX-17□ EX-17E□**NPN output type****I/O circuit diagram**

Symbols ... D1: Reverse supply polarity protection diode
D2: Reverse output polarity protection diode
ZD: Surge absorption zener diode
Tr: NPN output transistor

EX-15□, EX-15E□, EX-17□, EX-17E□ wiring diagram