

☆High Repetivity : 0.2% of F.S. Max.

☆Reset Time : 0.1S Max.

☆Setting Accuracy : 5 % of F.S. Max.

☆CE Approved : EMC , ESD & LVD

☆Guiding of Model :

MY - 10S - 2P - 220V

① ② ③ ④

① : Series

② : Range

③ : Contact Poles

④ : Operating Voltage




Specification


MODEL	MY-□□-□P-□□□V
Range	1S/3S/6S/10S/30S 60S/3M/6M/10M/30M 60M/3H/6H/10H/30H
Power Supply	12 or 24 VDC 10V α 20VAC 50/60Hz
Wattage Consump.	3VA max.
Control Output	Relay
Contact Rated	7A/250VAC
Repetivity	0.2% of F.S max.
Setting Accuracy	5% of F.S max.
Reset Time	0.1S max.
Insulation Strength	100M Ω /500VDC
Dielectric Strength	2.5KV/1 min.
Circumstance	-20 $^{\circ}$ ~+60 $^{\circ}$ C, 35~85%RH
Life of Relay	20 X 10 ⁶ Times

Wiring Chart Connection & Tim

MY-□□-2P-□□□V

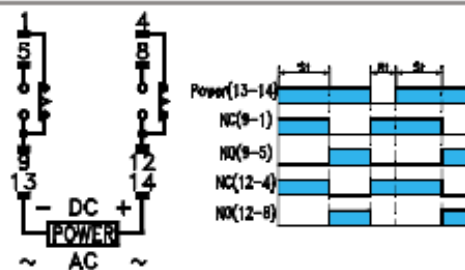

MY-□□-4P-□□□V

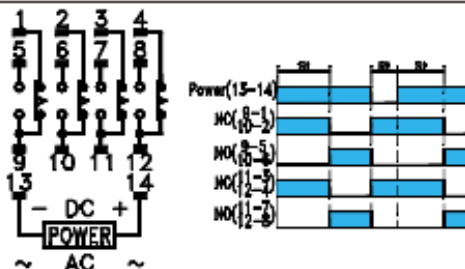

Dimension

